

Spool Size


MTL has introduced the international advanced injection machines and produces the spools by ourselves. Our exquisite technics ensures the spool quality to be suitable for transportation and storage and can avoid twisting and wire breakage. Our spools are in accordance with international standards and have 8 types: P3, P5, P10, P15, DIN125, DIN160, DIN200, DIN250.

麦特莱引进国际先进注塑机械，自产线轴，精湛工艺保证了线轴质量，以便于搬运和储存，防止线缠绕与断裂。MTL线轴均采用国际通用包装标准，共有8种规格：P3、P5、P10、P15、DIN125、DIN160、DIN200、DIN250。


Spool Type	Material	Outer Height D1	Inner Height D2 (mm)	Inner Diameter d (mm)	Outer Width W1 (mm)	Inner Width W2 (mm)	Wire Weight Kg	weight tolerance Kg
P3	ABS(PS)	130	80	21	110	90	3	± 0.05
P5	ABS(PS)	160	90	21	114	90	5	± 0.05
P10	ABS(PS)	200	90	25	134	110	10	± 0.05
P15	ABS(PS)	250	110	33	140	110	20	± 0.05
DIN125	ABS(PS)	124	80	21	124	100	3/3.5	± 0.05
DIN160	ABS(PS)	160	100	23	160	128	7/8	± 0.05
DIN200	ABS(PS)	199	124	23	199	159	15/16	± 0.05
DIN250	ABS(PS)	250	160	23	200	160	25	± 0.05

线轴型号	线轴材料	外侧高度	内侧高度	孔径大小	外侧宽度	内侧宽度	轴装重量	重量公差Kg
P3	ABS(PS)	130	80	21	110	90	3	± 0.05
P5	ABS(PS)	160	90	21	114	90	5	± 0.05
P10	ABS(PS)	200	90	25	134	110	10	± 0.05
P15	ABS(PS)	250	110	33	140	110	20	± 0.05
DIN125	ABS(PS)	124	80	21	124	100	3/3.5	± 0.05
DIN160	ABS(PS)	160	100	23	160	128	7/8	± 0.05
DIN200	ABS(PS)	199	124	23	199	159	15/16	± 0.05
DIN250	ABS(PS)	250	160	23	200	160	25	± 0.05

Spool Drawing

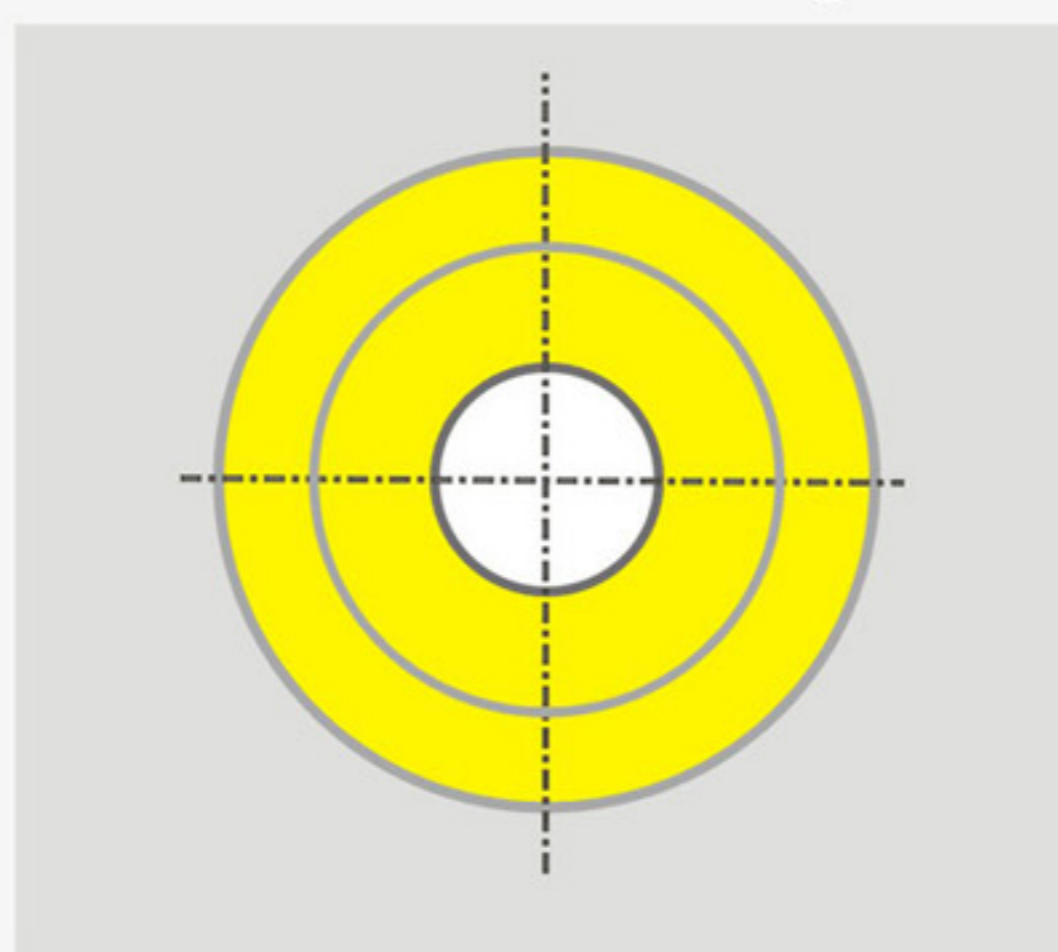


线轴图

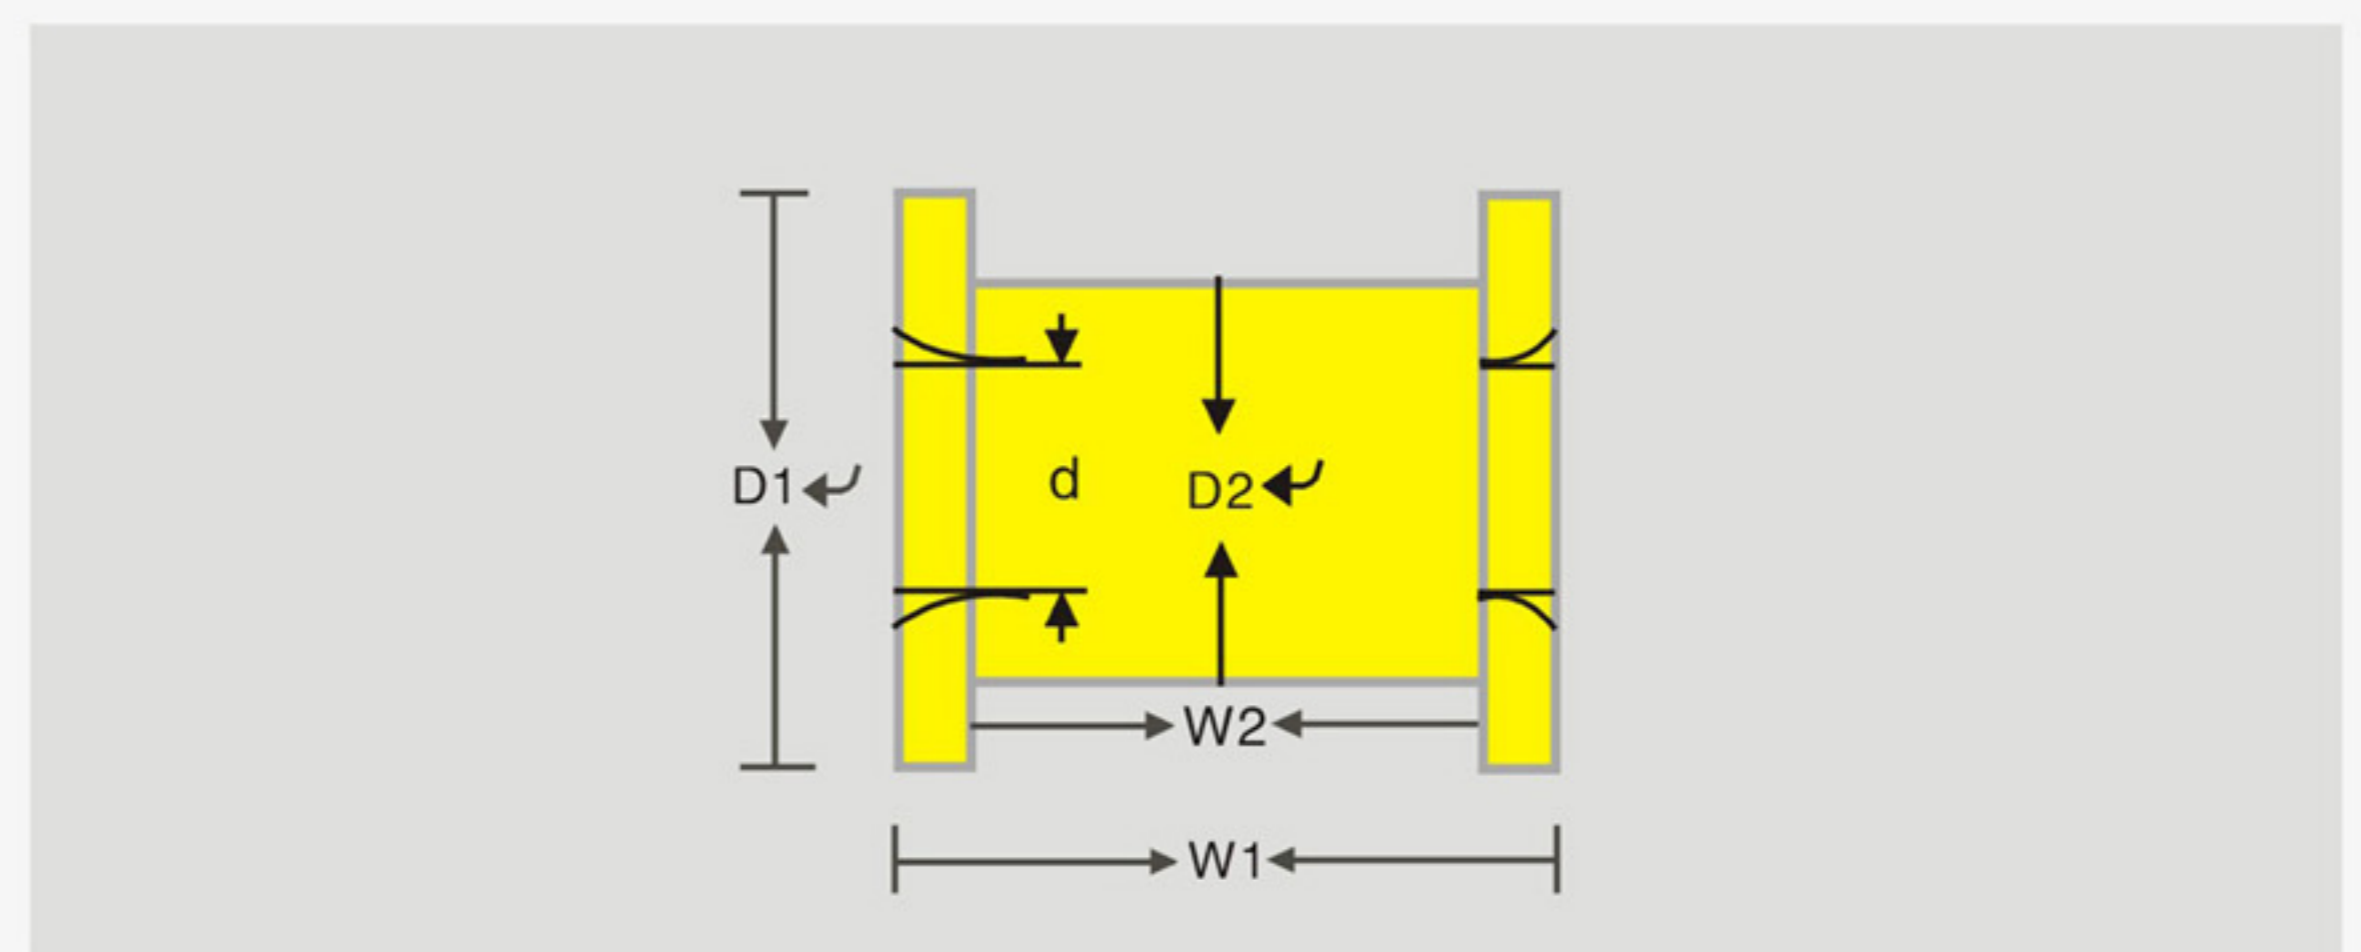

Spool Size

线轴尺寸

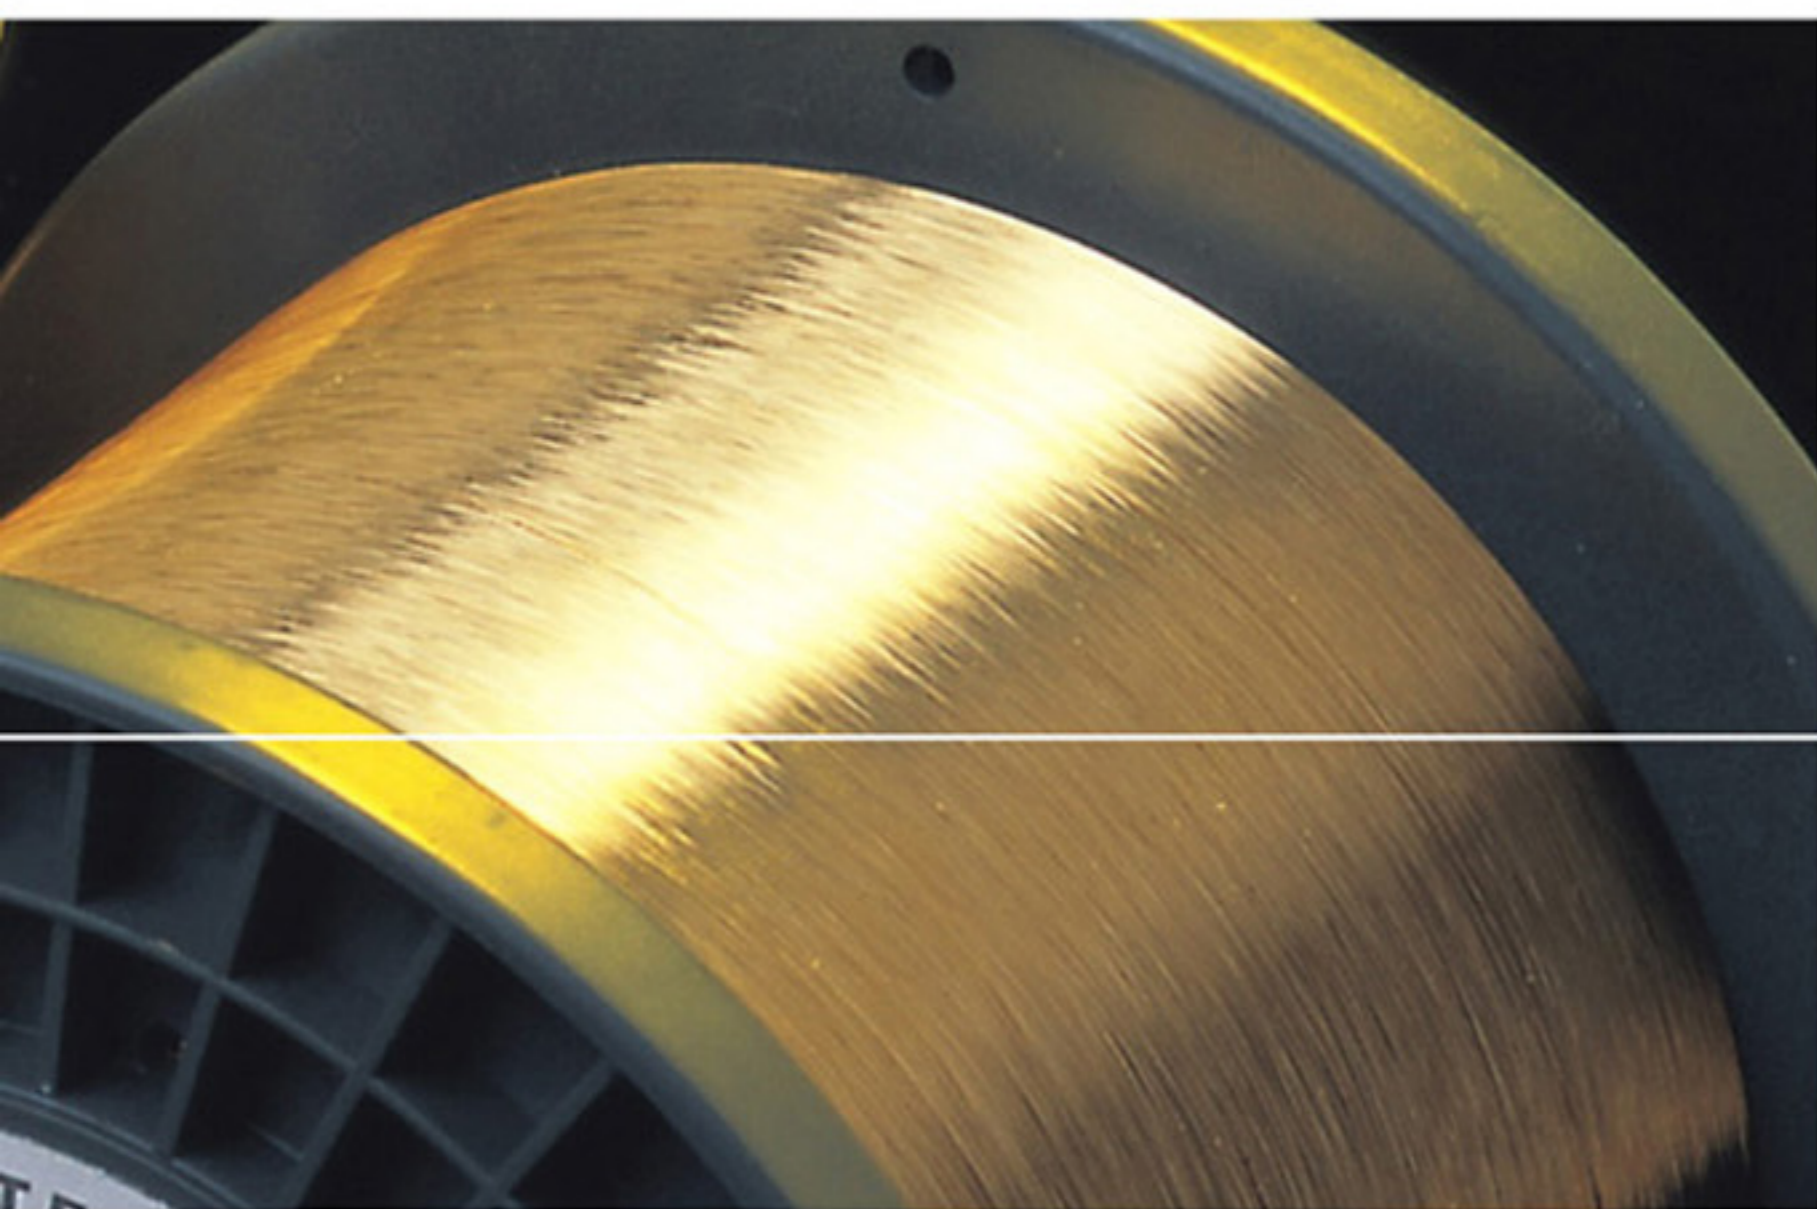

MTL superior quality is based on not only exquisite package, but also triplicate protection.

First protection: Dustproof paper for inner package.

Second protection: Precise PVC film for sealing.

Third protection: Shake proof carton box

优质精良的包装是产品的一部分，三重保护，维系着MTL卓越的产品品质。

一重保护：优质的内膜防尘纸

二重保护：密封用精密PVC胶模

三重保护：专业防震瓦楞纸盒

Spool Type	Roll / Ctn	Packed in Carton	Full Packed
P3	6		
P3	4		
P5	4		
P10	2		
P15	1		
DIN125	6		
DIN160	2		
DIN200	1		
DIN250	1		
线轴型号	卷/箱	装箱后	打包后

Packaging Details

包装明细